


Long Palm Lugs

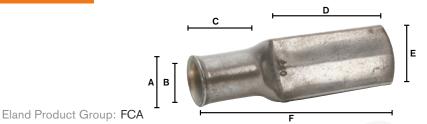

APPLICATION

Long palm lugs are used to connect a cable to its electrical source. The long palm provides added connectivity through a larger surface area for secure connections.

Available blank or drilled

THE CABLE LAB® AN ISO/IEC 17025 AND IECEE CBTL ACCREDITED FACILITY

Our world-class testing facility assures the quality and compliance of this cable through a continuous and rigorous testing regime.



SUSTAINABILITY COMMITMENT

We are on a journey to Net Zero.

We've committed to near-term emissions reductions and a net-zero target with the Science Based Targets initiative and we're a signatory to the United Nations Global Compact Sustainable Development Goals.

Learn more about embodied carbon and our carbon emissions reduction actions, our comprehensive recycling services, and wider ESG activities for sustainable operations at: www.elandcables.com/company/about-us/esg-sustainability











REGULATORY COMPLIANCE

This cable meets the requirements of the RoHS Directive 2015/65/EU and Reach Directive EC 1907/2006. RoHS compliance has been tested and confirmed by The Cable Lab®.









DIMENSIONS

ELAND PART NO.	CABLE SIZE mm ²	NOMINAL DIMENSIONS mm						PALM THICKNESS mm
		Α	В	С	D	Е	F	
FT10/LP	10	6.9	4.4	10	35	11.0	50	2.0
FT16/LP	16	8.0	5.6	11	35	11.0	52	2.2
FT25/LP	25	9.5	7.0	13	35	13.5	56	2.4
FT35/LP	35	11.0	8.2	18	35	15.5	57	2.8
FT50/LP	50	12.0	9.5	18	35	17.0	61	2.4
FT70/LP	70	15.0	11.5	18	75	21.2	105	2.0
FT95/LP	95	17.0	13.5	24	75	24.3	111	3.5
FT120/LP	120	19.0	15.0	27	75	27.2	115	4.0
FT150/LP	150	21.0	16.5	27	75	30.0	120	4.5
FT185/LP	185	23.0	18.5	30	75	33.5	125	4.5
FT240/LP	240	26.0	21.0	32	75	37.7	128	5.0
FT300/LP	300	28.0	23.0	37	75	41.0	137	5.0
FT400/LP	400	32.0	27.0	38	75	47.3	138	5.0
FT500/LP	500	38.0	30.0	50	75	55.0	160	8.2
FT630/LP	630	44.0	33.8	50	75	63.0	164	10.2
FT800/LP	800	49.0	38.0	56	75	70.0	171	11.0

The information contained within this datasheet is for guidance only and is subject to change without notice or liability. All the information is provided in good faith and is believed to be correct at the time of publication. When selecting cable accessories, please note that actual cable dimensions may vary due to manufacturing tolerances.