


Long Palm Lugs

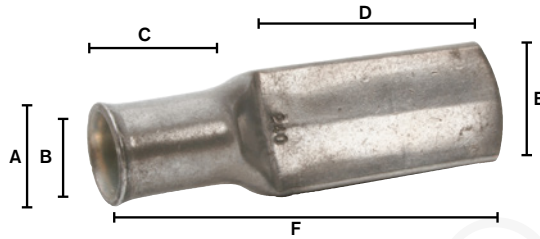

Eland Product Group: **FCA**

APPLICATION

Long palm lugs are used to connect a cable to its electrical source. The long palm provides added connectivity through a larger surface area for secure connections.

Note

Available blank or drilled



The electrical and dimensional properties of this product are measured by the Technical and Quality Assurance department at the Eland Cables laboratory. Cable performance in respect of conductor resistance, construction quality (workmanship), dimensional consistency, and other parameters are verified to published standards and approved product drawings. Conformance to RoHS (Restriction of the use of Hazardous Substances) is determined and confirmed.

DIMENSIONS

ELAND PART NO.	CABLE SIZE mm ²	NOMINAL DIMENSIONS mm						PALM THICKNESS mm
		A	B	C	D	E	F	
FT10/LP	10	6.9	4.4	10	35	11.0	50	2.0
FT16/LP	16	8.0	5.6	11	35	11.0	52	2.2
FT25/LP	25	9.5	7.0	13	35	13.5	56	2.4
FT35/LP	35	11.0	8.2	18	35	15.5	57	2.8
FT50/LP	50	12.0	9.5	18	35	17.0	61	2.4
FT70/LP	70	15.0	11.5	18	75	21.2	105	2.0
FT95/LP	95	17.0	13.5	24	75	24.3	111	3.5
FT120/LP	120	19.0	15.0	27	75	27.2	115	4.0
FT150/LP	150	21.0	16.5	27	75	30.0	120	4.5
FT185/LP	185	23.0	18.5	30	75	33.5	125	4.5
FT240/LP	240	26.0	21.0	32	75	37.7	128	5.0
FT300/LP	300	28.0	23.0	37	75	41.0	137	5.0
FT400/LP	400	32.0	27.0	38	75	47.3	138	5.0
FT500/LP	500	38.0	30.0	50	75	55.0	160	8.2
FT630/LP	630	44.0	33.8	50	75	63.0	164	10.2
FT800/LP	800	49.0	38.0	56	75	70.0	171	11.0

The information contained within this datasheet is for guidance only and is subject to change without notice or liability. All the information is provided in good faith and is believed to be correct at the time of publication. When selecting cable accessories, please note that actual cable dimensions may vary due to manufacturing tolerances.