


NGED Approved Copper MDPE Triplex 6.35/11 (12)kV Cable

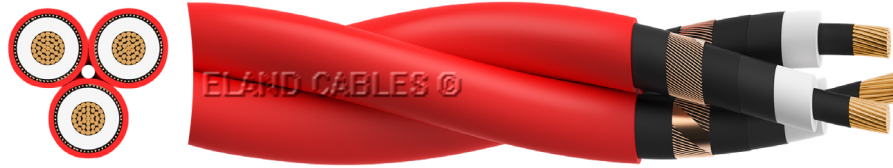

CHARACTERISTICS

Voltage Rating
6.35/11 (12)kV

CONSTRUCTION

Conductor
Round stranded compacted watertight copper

Conductor Screen
Extruded fully bonded semi-conducting compound

Insulation
XLPE (Cross-Linked Polyethylene)

Insulation Screen
Extruded fully bonded semi-conducting compound

Longitudinal Water Blocking
Semi-conducting water blocking tape

Screen
Copper wires plus copper tape

Longitudinal Water Blocking
Water blocking tape

Sheath
MDPE (Medium Density Polyethylene)

Sheath Colour
● Red

STANDARDS

BS 7870-4.10 , NGED / WPD EE SPEC 82/3

THE CABLE LAB[®]

AN ISO/IEC 17025 AND IECCE CBTL ACCREDITED FACILITY

Our world-class testing facility assures the quality and compliance of this cable through a continuous and rigorous testing regime.



SUSTAINABILITY COMMITMENT

We are on a journey to Net Zero.

We've committed to near-term emissions reductions and a net-zero target with the Science Based Targets initiative and we're a signatory to the United Nations Global Compact Sustainable Development Goals.

Learn more about embodied carbon and our carbon emissions reduction actions, our comprehensive recycling services, and wider ESG activities for sustainable operations at: www.elandcables.com/company/about-us/esg-sustainability



REGULATORY COMPLIANCE

This cable meets the requirements of the RoHS Directive 2015/65/EU and Reach Directive EC 1907/2006. RoHS compliance has been tested and confirmed by The Cable Lab[®].



DIMENSIONS

| ELAND CODE | NO. OF CORES | NOMINAL CROSS SECTIONAL AREA mm ² | NOMINAL DIAMETER OVER INSULATION mm | NOMINAL CROSS SECTIONAL AREA OF METALLIC SCREEN mm ² | NOMINAL OUTER DIAMETER OF SINGLE CORE CABLE mm | NOMINAL OUTER DIAMETER OVER TRIPLEX FORMATION mm | NOMINAL WEIGHT kg/km |
|----------------|--------------|---|--|--|---|---|-------------------------|
| D027018RD000CU | 3x1 | 300 | 28.2 | 35 | 39 | 82 | 10800 |

ELECTRICAL CHARACTERISTICS

| MAXIMUM DC RESISTANCE @20°C Ohm/km | MAXIMUM AC RESISTANCE @90°C Ohm/km | REACTANCE 50Hz Ohm/km | MUTUAL CAPACITANCE μF/km | CONTINUOUS CURRENT RATING IN GROUND A |
|---------------------------------------|---------------------------------------|--------------------------|-----------------------------|--|
| 0.0601 | 0.079 | 0.096 | 0.52 | 600 |

Laying conditions at trefoil formation:

Soil thermal resistivity: 1.2 Km/Watt

Laying depth: 0.8m

Soil temperature: 15°C