


XHIAV 8.7/15kV Cable

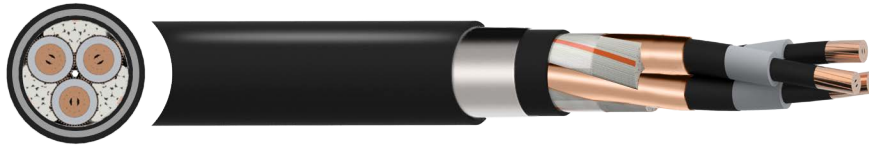

Eland Product Group: MP44

APPLICATION

Portuguese reference Medium Voltage cable for power distribution and power supply stations used in Utility and Industrial applications, for rated voltages up to 8.7/15kV. Suitable for fixed installations, directly buried. Good mechanical protection.

CHARACTERISTICS

Voltage Rating U₀/U (Um)
8.7/15 (17.5)kV

Temperature Rating

Conductor maximum operating temperature: 90°C
Maximum short-circuit temperature: 250°C

Minimum Bending Radius

During installation: 15 x overall diameter
After installation: 10 x overall diameter

CONSTRUCTION

Conductor

Class 2 Copper, circular, stranded conductor

Conductor Screen

Semi-conductive XLPE (Cross-Linked Polyethylene)

Insulation

XLPE (Cross-Linked Polyethylene)

Insulation Screen

Semi-conductive XLPE (Cross-Linked Polyethylene)

Metallic Screen

Copper tape screen

Bedding

PVC (Polyvinyl Chloride)

Armour

STA (Steel Tape Armoured)

Sheath

PVC (Polyvinyl Chloride)

Sheath Colour

● Black

STANDARDS

IEC 60228, IEC 60502-2
Flame retardant to IEC 60332-1-2

ISO/IEC 17025 LABORATORY TESTED

This product is subject to the Quality Assurance protocols of The Cable Lab®, an ISO/IEC 17025 accredited cable testing laboratory. Testing includes vertical flame, conductor resistance, tensile & elongation, and dimensional consistency, verified to published standards and approved product drawings.



8578



FS 672069



EMS 672067



OHS 672066

REGULATORY COMPLIANCE

This cable meets the requirements of the RoHS Directive 2011/65/EU. RoHS compliance has been tested and confirmed by The Cable Lab® as meeting the requirements of the BSI RoHS Trusted Kitemark™.



KM 634267





DIMENSIONS

ELAND PART NO.	NO. OF CORES	NOMINAL CROSS SECTIONAL AREA mm ²	NOMINAL DIAMETER mm		NOMINAL WEIGHT kg/km
			Over Insulation	Overall	
MP4415KV03025	3	25	17.0	54.5	4335
MP4415KV03035	3	35	18.0	57.0	4835
MP4415KV03050	3	50	19.0	59.5	5470
MP4415KV03070	3	70	21.0	63.5	6425
MP4415KV03095	3	95	22.5	67.5	7505
MP4415KV03120	3	120	24.5	71.5	8600
MP4415KV03150	3	150	25.5	74.5	9730
MP4415KV03185	3	185	26.5	77.5	10985
MP4415KV03240	3	240	29.5	83.5	13290
MP4415KV03300	3	300	32.0	91.5	16705
MP4415KV03400	3	400	35.0	98.5	20225

ELECTRICAL CHARACTERISTICS

NO. OF CORES	NOMINAL CROSS SECTIONAL AREA mm ²	CURRENT CARRYING CAPACITY Amps		CONDUCTOR MAXIMUM SHORT-CIRCUIT CURRENT, T=1S kA	MAXIMUM CONDUCTOR DC RESISTANCE AT 20°C ohm/km	INDUCTANCE mH/km	CAPACITANCE μF/km
		In air	Buried				
3	25	143	148	3.6	0.7270	0.43	0.18
3	35	172	177	5.0	0.5240	0.41	0.20
3	50	205	209	7.5	0.3870	0.39	0.21
3	70	253	255	10.0	0.2680	0.36	0.24
3	95	307	304	13.6	0.1930	0.34	0.27
3	120	352	345	17.2	0.1530	0.33	0.29
3	150	397	388	21.5	0.1240	0.32	0.31
3	185	453	437	26.5	0.0991	0.31	0.33
3	240	529	503	34.3	0.0754	0.30	0.38
3	300	599	563	42.9	0.0601	0.29	0.42
3	400	683	631	57.2	0.0470	0.27	0.46

The information contained within this datasheet is for guidance only and is subject to change without notice or liability. All the information is provided in good faith and is believed to be correct at the time of publication. When selecting cable accessories, please note that actual cable dimensions may vary due to manufacturing tolerances.