


N2XSY HD620 XLPE PVC - 12/20 (24)kV Cable

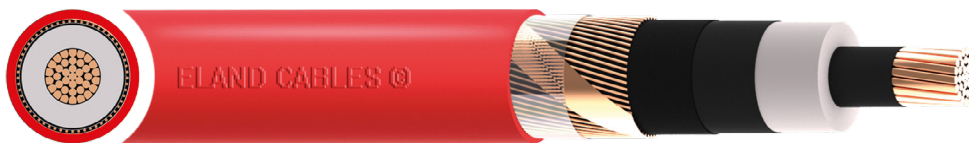

Eland Product Group: H8A

APPLICATION

Medium voltage cables for distribution networks; also for connection to generation units and plant and process connection. To be laid directly in ground, outdoors, indoors and in cable ducts.

CHARACTERISTICS

Voltage Rating U_0/U (Um)
12/20 (24)kV

Temperature Rating
Fixed: -20°C to +90°C

Minimum Bending Radius
15 x overall diameter

CONSTRUCTION

Conductor
Stranded copper

Inner Semi-Conductive Layer
Semi-conductive material

Insulation
XLPE (Cross-Linked Polyethylene)

Outer Semi-Conductive Layer
Semi-conductive material

Screen
Copper wires

Sheath
PVC (Polyvinyl Chloride)

Sheath Colour
● Red

STANDARDS

IEC 60502-2, DIN VDE 0276-620, HD 620, IEC/EN 60228

Flame Retardant according to IEC/EN 60332-1-2

THE CABLE LAB[®]

AN ISO/IEC 17025 AND IECCE CBTL ACCREDITED FACILITY

Our world-class testing facility assures the quality and compliance of this cable through a continuous and rigorous testing regime.



SUSTAINABILITY COMMITMENT

We are on a journey to Net Zero.

We've committed to near-term emissions reductions and a net-zero target with the Science Based Targets initiative and we're a signatory to the United Nations Global Compact Sustainable Development Goals.

Learn more about embodied carbon and our carbon emissions reduction actions, our comprehensive recycling services, and wider ESG activities for sustainable operations at: www.elandcables.com/company/about-us/esg-sustainability



SCIENCE
BASED
TARGETS

**BUSINESS
AMBITION FOR 1.5°C**



REGULATORY COMPLIANCE

This cable meets the requirements of the RoHS Directive 2015/65/EU and Reach Directive EC 1907/2006. RoHS compliance has been tested and confirmed by The Cable Lab[®].



DIMENSIONS

ELAND PART NO.	NO. OF CORES	NOMINAL CROSS SECTIONAL AREA mm ²		MINIMUM OVERALL DIAMETER mm	MAXIMUM OVERALL DIAMETER mm	NOMINAL WEIGHT kg/km
		Conductor	Copper Wire Screen			
H8A20KV01035	1	35	16	27	32	1100
H8A20KV01050	1	50	16	28	33	1250
H8A20KV01070	1	70	16	30	35	1450
H8A20KV01095	1	95	16	31	36	1750
H8A20KV01120	1	120	16	33	38	2050
H8A20KV01150	1	150	25	34	39	2400
H8A20KV01185	1	185	25	36	41	2800
H8A20KV01240	1	240	25	39	44	3400
H8A20KV01300	1	300	25	41	46	4000
H8A20KV01400	1	400	35	44	49	4950
H8A20KV01500	1	500	35	47	52	6050

ELECTRICAL CHARACTERISTICS

NOMINAL CROSS SECTIONAL AREA mm ²		CURRENT CARRYING CAPACITY Amps	
Conductor	Copper Wire Screen	In Ground	In Air
35	16	189	200
50	16	222	239
70	16	271	297
95	16	323	361
120	16	367	416
150	25	409	470
185	25	461	538
240	25	532	634
300	25	599	724
400	35	671	829
500	35	754	953

The information contained within this datasheet is for guidance only and is subject to change without notice or liability. All the information is provided in good faith and is believed to be correct at the time of publication. When selecting cable accessories, please note that actual cable dimensions may vary due to manufacturing tolerances.