


XHIORV 18/30kV Cable

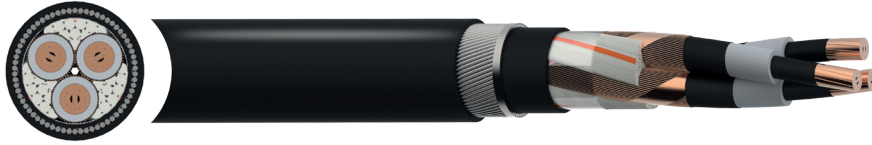

Eland Product Group: MP55

APPLICATION

Portuguese MV Cable for power distribution and power supply stations used in Utility and Industrial applications, for rated voltages to 18/30kV. Suitable for fixed installations, directly buried. Good mechanical protection.

CHARACTERISTICS

Voltage Rating U_0/U (U_m)
18/30 (36)kV

Temperature Rating

Conductor maximum operating temperature: 90°C
Maximum short-circuit temperature: 250°C

Minimum Bending Radius

During installation: 15 x overall diameter
After installation: 10 x overall diameter

CONSTRUCTION

Conductor

Class 2 Copper, circular, stranded

Conductor Screen

Semi-conductive XLPE (Cross-Linked Polyethylene)

Insulation

XLPE (Cross-Linked Polyethylene)

Insulation Screen

Semi-conductive XLPE (Cross-Linked Polyethylene)

Metallic Screen

Copper wire screen

Tape

Plastic tape is applied over the screen

Filler

Extruded polymeric material

Bedding

PVC (Polyvinyl Chloride)

Armour

SWA (Galvanized Steel Wire Armoured)

Sheath

Extruded PVC (Polyvinyl Chloride) type ST2

Sheath Colour

●Black

STANDARDS

IEC 60228, IEC 60502-2
Flame retardant according to IEC/BS EN 60332-1-2,
IEC/BS EN 60332-3-24

ISO/IEC 17025 LABORATORY TESTED

This product is subject to the Quality Assurance protocols of The Cable Lab[®], an ISO/IEC 17025 accredited cable testing laboratory. Testing includes vertical flame, conductor resistance, tensile & elongation, and dimensional consistency, verified to published standards and approved product drawings.



8578



FS 672069



EMS 672067



OHS 672066

REGULATORY COMPLIANCE

This cable meets the requirements of the RoHS Directive 2011/65/EU. RoHS compliance has been tested and confirmed by The Cable Lab[®] as meeting the requirements of the BSI RoHS Trusted Kitemark[™].



KM 634267



DIMENSIONS

ELAND PART NO.	NO. OF CORES	NOMINAL CROSS SECTIONAL AREA mm ²	NOMINAL DIAMETER mm		NOMINAL WEIGHT kg/km
			Over Insulation	Overall	
MP5530KV03050	3	50	26.0	76.0	7595
MP5530KV03070	3	70	28.0	80.5	8730
MP5530KV03095	3	95	29.5	86.0	10845
MP5530KV03120	3	120	31.5	90.0	12105

ELECTRICAL CHARACTERISTICS

NO. OF CORES	NOMINAL CROSS SECTIONAL AREA mm ²	CURRENT CARRYING CAPACITY Amps		CONDUCTOR MAXIMUM SHORT-CIRCUIT CURRENT. T=1S kA	MAXIMUM CONDUCTOR DC RESISTANCE AT 20°C ohm/km	INDUCTANCE mH/km	CAPACITANCE µF/km
		In air	Buried				
3	50	205	209	7.5	0.3870	0.45	0.14
3	70	253	255	10.0	0.2680	0.41	0.16
3	95	307	304	13.6	0.1930	0.39	0.18
3	120	352	345	17.2	0.1530	0.38	0.19

The information contained within this datasheet is for guidance only and is subject to change without notice or liability. All the information is provided in good faith and is believed to be correct at the time of publication. When selecting cable accessories, please note that actual cable dimensions may vary due to manufacturing tolerances.